


ENERGIZER 522 (LR61) Alkaline Power

9V



Industry Standard Dimensions

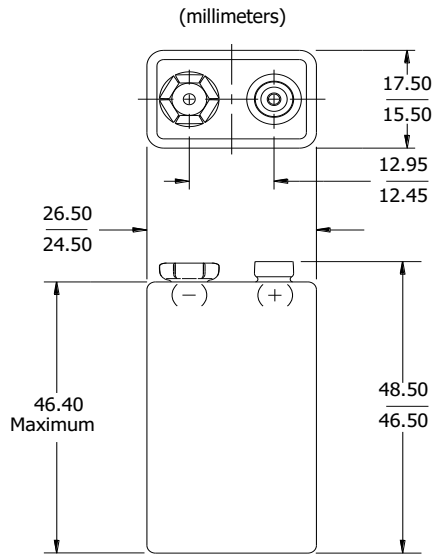


Specifications

| | |
|-------------------------|--|
| Classification: | Alkaline |
| Chemical System: | Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium |
| Designation: | ANSI 1604A, IEC-6LF22 or 6LR61 |
| Nominal Voltage: | 9.0 volts |
| Operating Temp: | -18°C to 55°C |
| Typical Weight: | 46.0 grams |
| Typical Volume: | 21.0 cubic centimeters |
| Jacket: | Metal |
| Shelf Life: | 5 years at 21°C |
| Terminal: | Miniature Snap |

Performance Comparison

A522 vs. Typical Carbon Zinc (9V) at 21°C

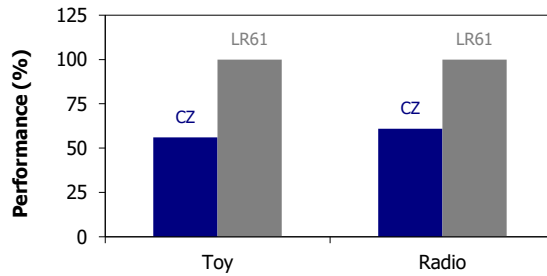


Industry Standard Testing Protocol

Device Selection Guide:

- Toy
- Baby Monitor
- Garage Opener
- Clock Radio
- Smoke Detector

Battery Selection Indicator

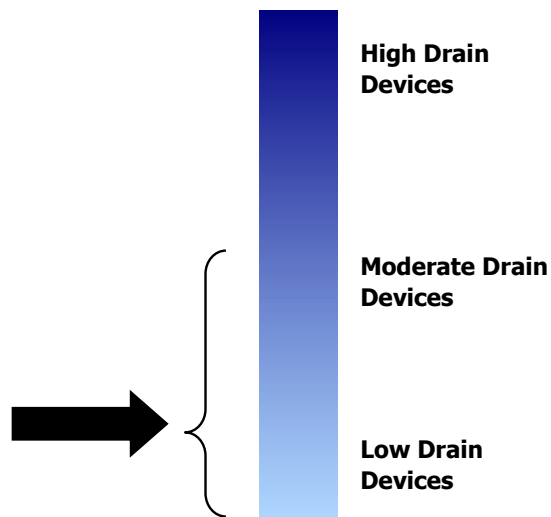

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.